


TECHNICAL SPECIFICATIONS

TYPE		DIP N/O	
TERMINAL TYPE		PCB	
CONTACT CONFIGURATION		1 N/O	2 N/O
RATED CARRYING CURRENT (RESISTIVE) AT MAX 200 VDC & 10W		0.5A	
INITIAL CONTACT RESISTANCE (MAX)		0.150 Ω	
COIL NOMINAL VOLTAGES	DC	5 - 48 V	
	AC	-	
OPERATING POWER MIN-MAX)FOR DC COIL		0.31 - 0.52 W	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACT	250 VDC	
	COIL TO CONTACT	500 VDC	
INSULATION RESISTANCE AT 500 VDC AT 27°C & 65% RH		1000 MΩ	
OPERATE TIME (MAX)		1 ms	
RELEASE TIME (MAX)		0.5 ms	
AMBIENT TEMPERATURE		-40°C To + 85°C	
LIFE EXPECTANCY		10 ⁷ Operations at Optimum Load	
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.		10.5 x 20 x 7.5	10.5 x 20 x 11.5
MAX WEIGHT IN GRAMS (APPROX.)		5 gms	
TYPICAL CAPACITANCE		0.2 PF Across Contact 3.5 PF Contact to Coil	
REED BREAK - DOWN VOLTAGE		250 VDC	
VIBRATION		20g, 10-2000 Hz	
SHOCK		50g, 11 ms	

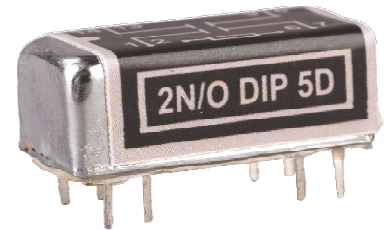

(Photo For Representation Purpose Only)

SALIENT FEATURES

- Excellent Isolation
- Epoxy Encapsulation
- DIL Socket / PCB Mounting

APPLICATIONS

- | | | |
|-----------------------|------------------|---------------|
| • Memory | • Logic | • Programming |
| • Computers | • Communications | • Telemetry |
| • Circuit Isolation | • RF Switching | • Scanners |
| • Encoders & Decoders | | |

NOTE:-


- 1) All Specification / Dimensions subject to Tolerance.
- 2) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.




COIL – DATA (ALL VALUES AT 27°C ± 2°AMBIENT, COLD START)

NOMINAL VOLTAGE (DC)	RESISTANCE IN OHM'S ± 10% Ω		MUST OPERATE VOLTAGE	MUST RELEASE VOLTAGE	OPERATING POWER FOR DC COIL (W)	
	1 N/O	2 N/O			1 N/O	2 N/O
5 V	200	100	4	0.5	0.13	0.25
12 V	500	275	9	1.2	0.29	0.52
24 V	2.1k	1.1k	18	2.4	0.27	0.52
48 V	5k	5k	36	4.8	0.46	0.46

ORDERING CODE FOR RELAY

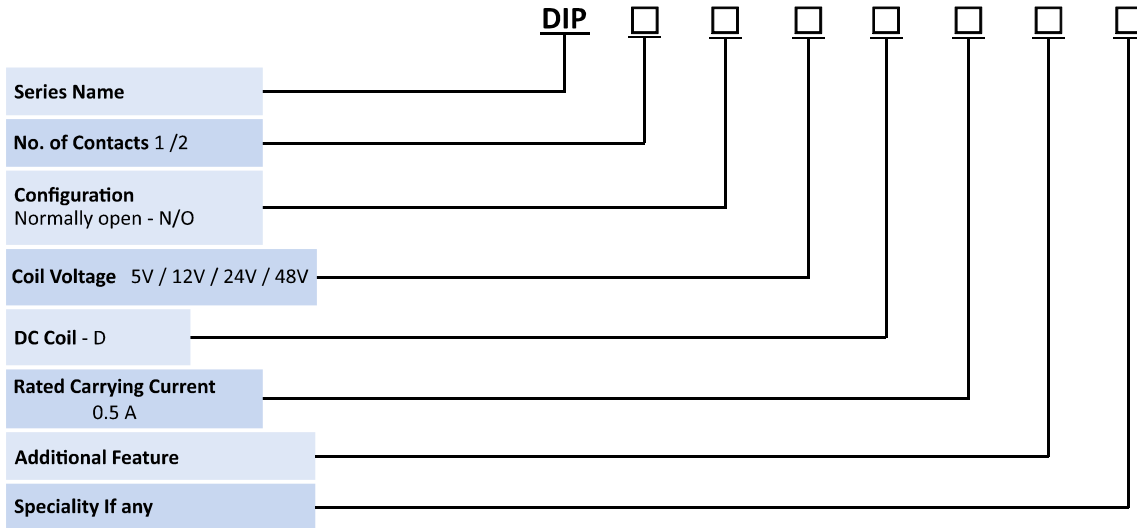

DIMENSIONS

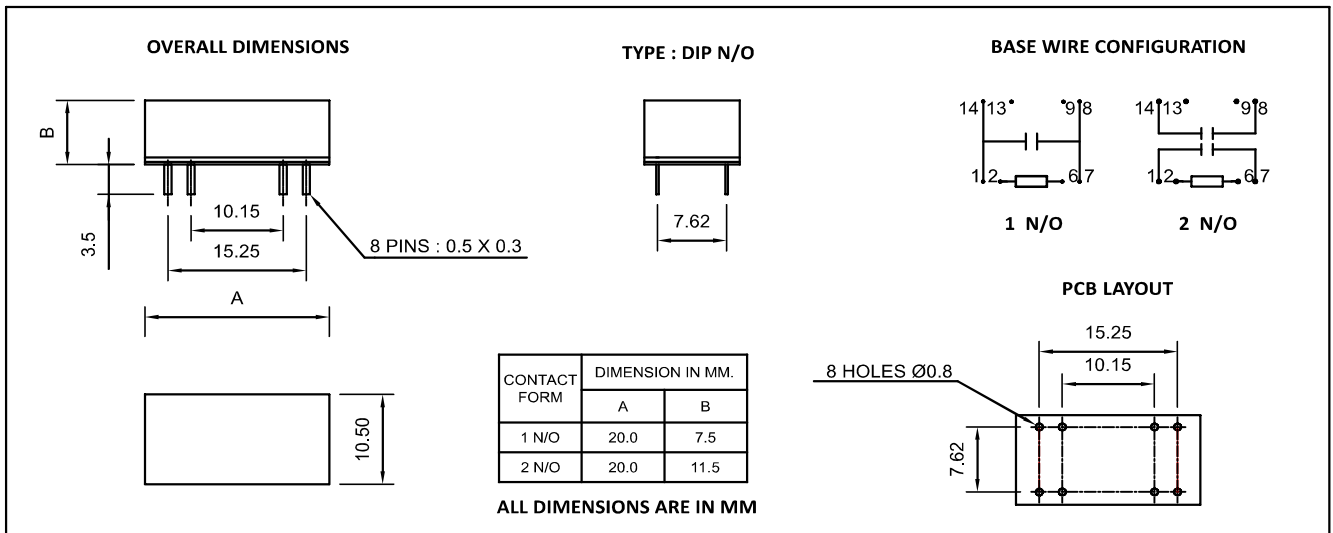

* Relay Size For 1 N/O 48 VDC will Remain Same as 2 N/O 48 VDC .

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be ±0.2mm
 Outline dimension 1mm and 5mm, tolerance should be ±0.3mm Outline dimension 5mm tolerance should be ±0.4mm
 2) The tolerance without indicating for PCB layout is always ±0.2mm

