

MPCS 8 / 11

Formerly known as Socket For MPC , HMPC , LMPC & ON OFF Series Relays



TECHNICAL SPECIFICATIONS

TYPE	MPCS 8 / 11	
TERMINAL TYPE	Screw Terminal	
PINS	8 Pin	11 Pin
RATED CARRYING CURRENT (RESISTIVE) AT 220 VDC / 250 VAC	16 A	12 A
BODY MATERIAL	High Electric Grade Bakelite	
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Brass Electroplated	
DI-ELECTRIC STRENGTH	2 kV	
MAXIMUM TIGHTENING TORQUE	0.6 Nm	
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	3000MΩ	
AMBIENT TEMPERATURE	-25°C To + 55°C	
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.	40.9 X 51.7 (+4) X 21	43 X 51 (+4) X 31
MAX WEIGHT IN GRAMS (APPROX.)	38 g	54 g
MOUNTING	Din Rail & Screw	




(Photo For Representation Purpose Only)



APPLICATIONS

- Ideal Substitute for Costly Relays & Contactors having Front Screw Terminals
- For Plug-In Relays Rapid Stop Unit, Timers, Smoke Detectors & any other Plug-In Module / Instrument

ORDERING CODE FOR SOCKET

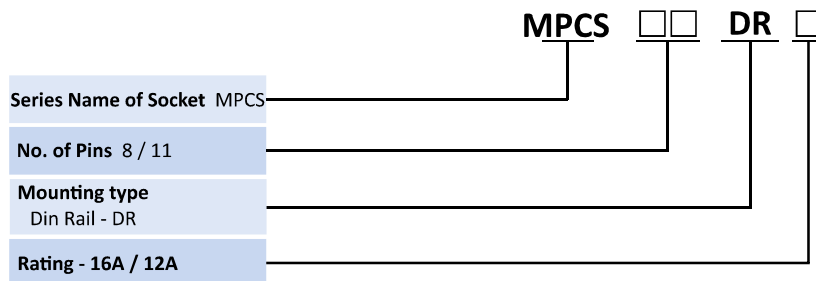

NOTE:-

- 1) Recommended for MPC series relays, LMPC Relay, ON Relay & OFF Relay
- 2) All Specifications / Dimensions subject to Tolerance
- 3) MPCS 11 socket is used for LMPC relays
- 4) MPCS 8 socket is used for On Off relays



+91 9152626104



+91 7045459530





sales@plarelays.com



www.plarelays.com

DIMENSIONS

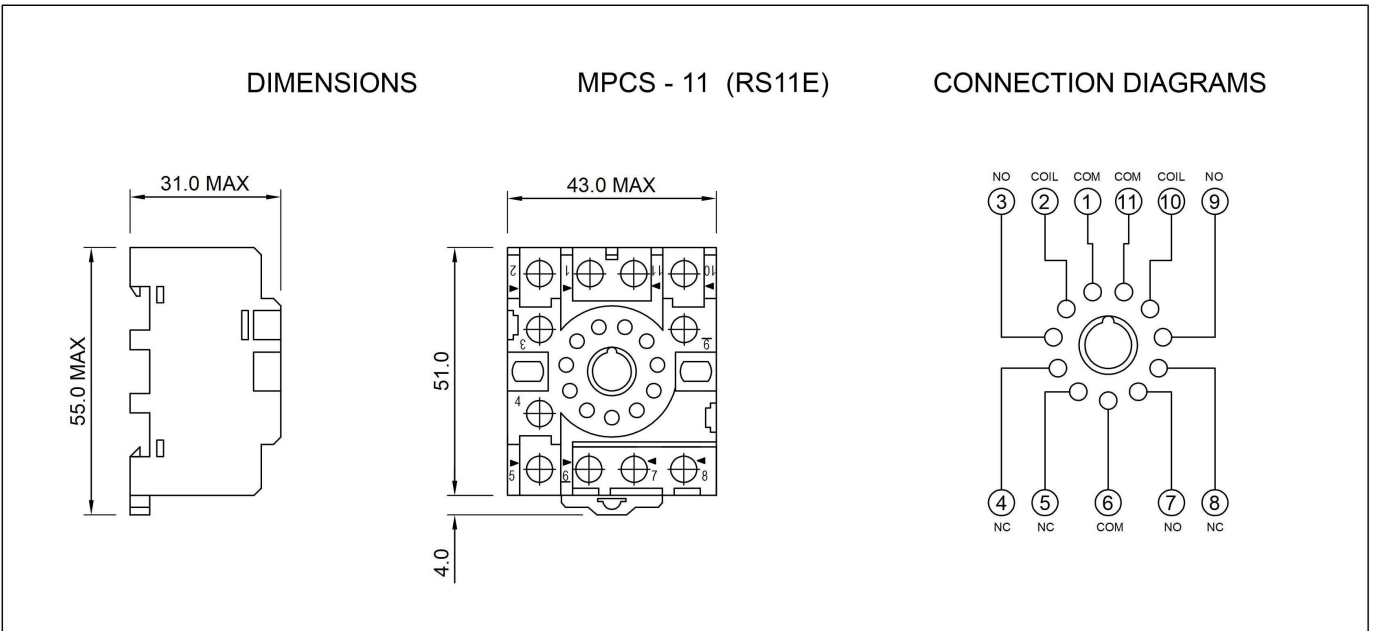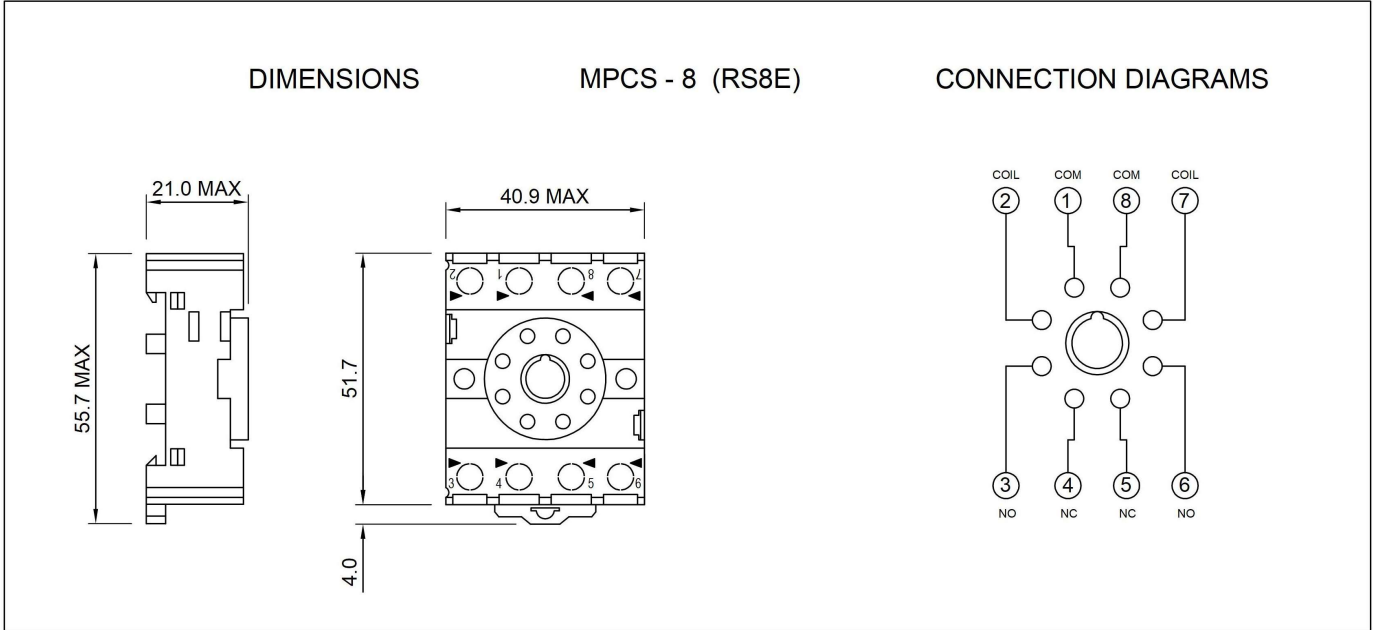

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be ± 0.2 mm
 Outline dimension 1mm and 5mm, tolerance should be ± 0.3 mm Outline dimension 5mm tolerance should be ± 0.4 mm
 2) The tolerance without indicating for PCB layout is always ± 0.2 mm