

PMYS DR 8/14 SOCKET

Formerly known as SDR PMY Din Rail Socket for PMY & PMY-F .



TECHNICAL SPECIFICATIONS


TYPE	PMYS DR 8/14 PIN	
TERMINAL TYPE	Din Rail	
CONTACT CONFIGURATION	8 Pin	14 Pin
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC	10 A	
BODY MATERIAL	High Electric Grade Bakelite	
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Electroplated	
TERMINALS	Brass Electroplated	
DI-ELECTRIC STRENGTH	2500 VAC	
MAXIMUM TIGHTENING TORQUE	0.6 Nm	
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	500MΩ	
AMBIENT TEMPERATURE	-25°C To + 55°C	
ALL DIMENSIONS ARE IN mm (W x L x H)	22.5 X 68.0 (+2.8) X 29.7 (8 Pin)	29.5 X 68.0 (+2.8) X 29.7 (14 Pin)
WEIGHT IN GRAMS	30 gms	45 gms
MOUNTING	Din Rail & Screw	



APPLICATIONS

- Ideal Substitute for Costly Relays & Contractors having Front Screw Terminals For Plug in Module & Instrument

ORDERING CODE FOR RELAY

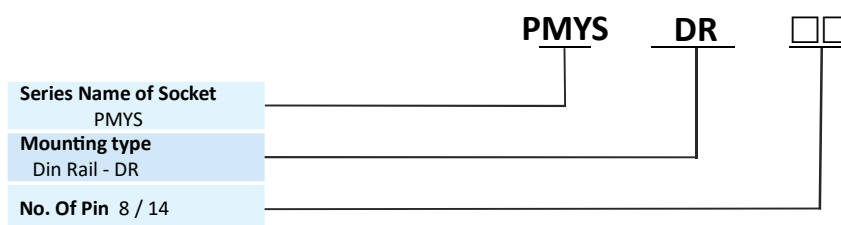

NOTE:-

- 1) Recommended for PMY series relays for Din Rail Mount.
- 2) All Specification / Dimensions subject to Tolerance.
- 3) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 22 25106104/05




+91 7045459530



sales@plarelays.com



www.plarelays.com

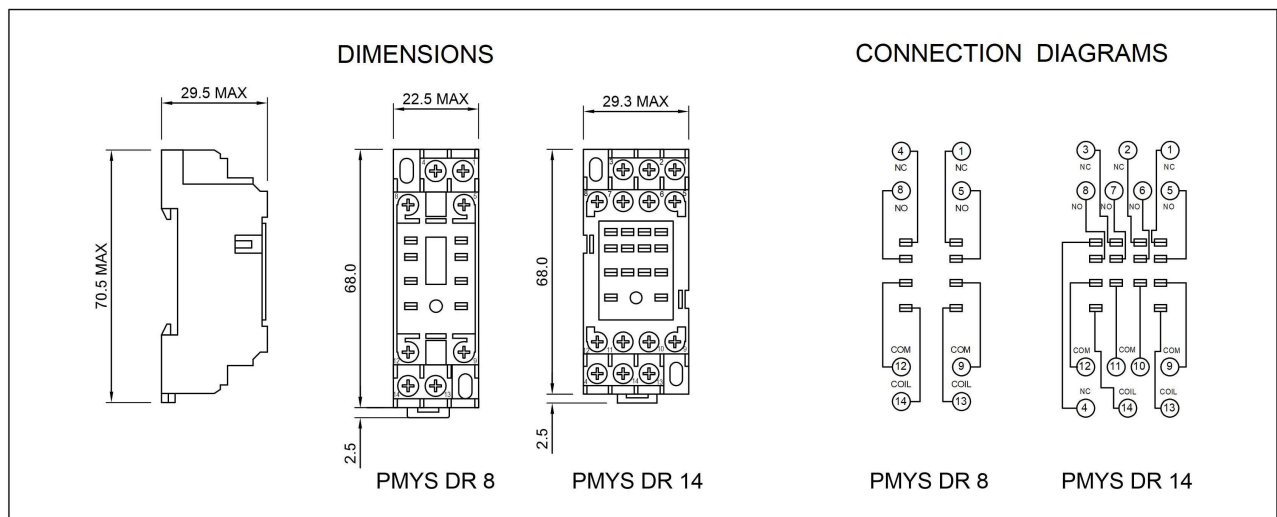

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be $\pm 0.2\text{mm}$
Outline dimension 1mm and 5mm, tolerance should be $\pm 0.3\text{mm}$ Outline dimension 5mm tolerance should be $\pm 0.4\text{mm}$
2) The tolerance without indicating for PCB layout is always $\pm 0.2\text{mm}$