


SPCB PMY 8/14 SOCKET

PCB Mount Socket for PMY & PMY-F Series Relays




TECHNICAL SPECIFICATIONS

TYPE	SPCB PMY 8 PIN / 14 PIN	
TERMINAL TYPE	PCB	
CONTACT CONFIGURATION	8 Pin	14 Pin
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC	10 A	
BODY MATERIAL	High Electric Grade Bakelite	
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Electroplated	
TERMINALS	Brass Electroplated	
DI-ELECTRIC STRENGTH	2.5 kV	
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	100 MΩ	
AMBIENT TEMPERATURE	-25°C To + 85°C	
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.	21.6 X 28.5 X 11 (+4.50)	
MAX WEIGHT IN GRAMS (APPROX.)	7 gms	8 gms
MOUNTING	PCB	

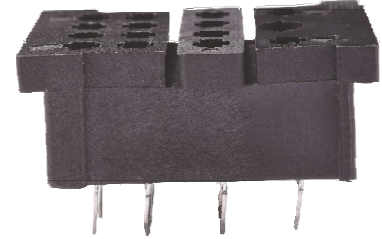


(Photo For Representation Purpose Only)



APPLICATIONS

- Ideal Substitute for Costly Relays & Contractors having Front Screw Terminals.
- For Plug in Module & Instrument .

ORDERING CODE FOR RELAY

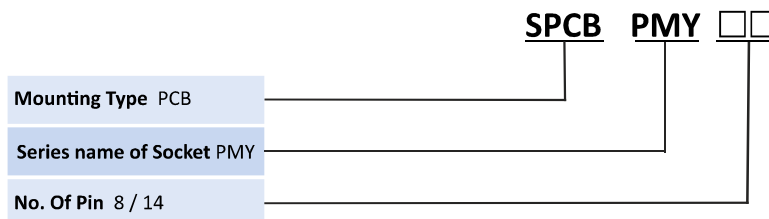

NOTE:-

- 1) Recommended for PMY relays series for PCB Mounting.
- 2) All Specification / Dimensions subject to Tolerance.
- 3) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 9152626104



+91 7045459530





sales@plarelays.com



www.plarelays.com

1

DIMENSIONS

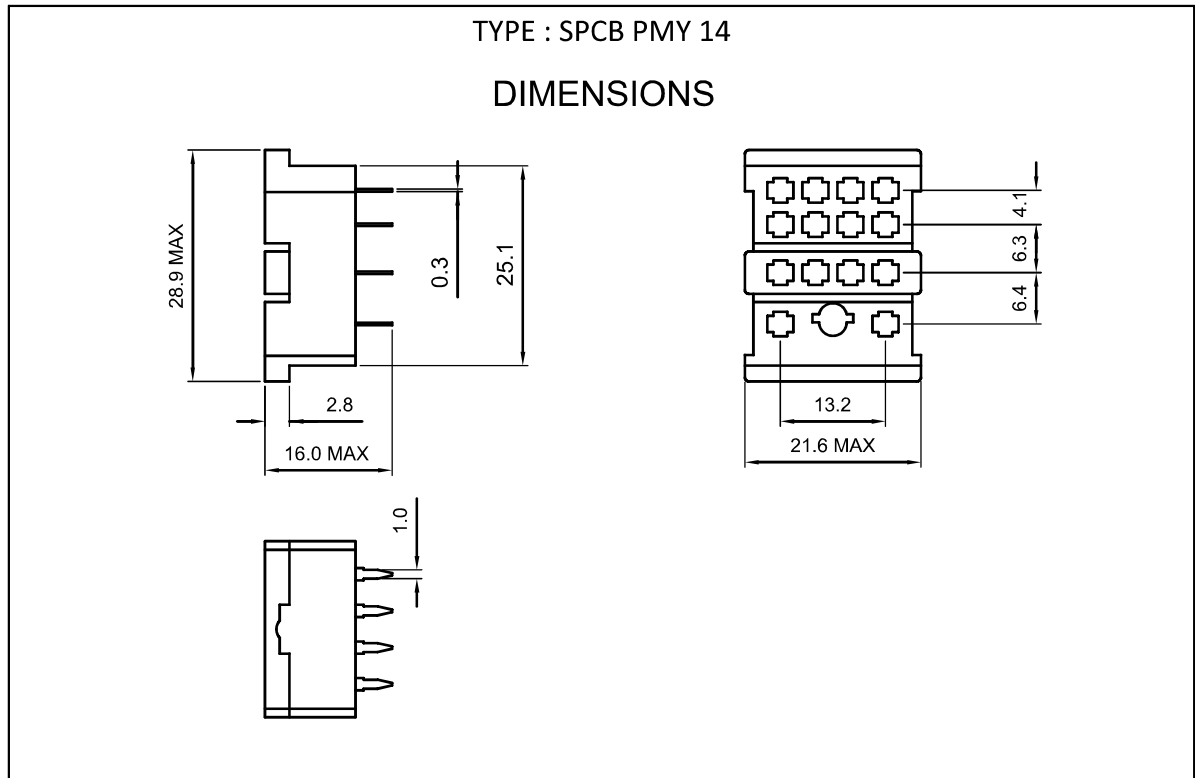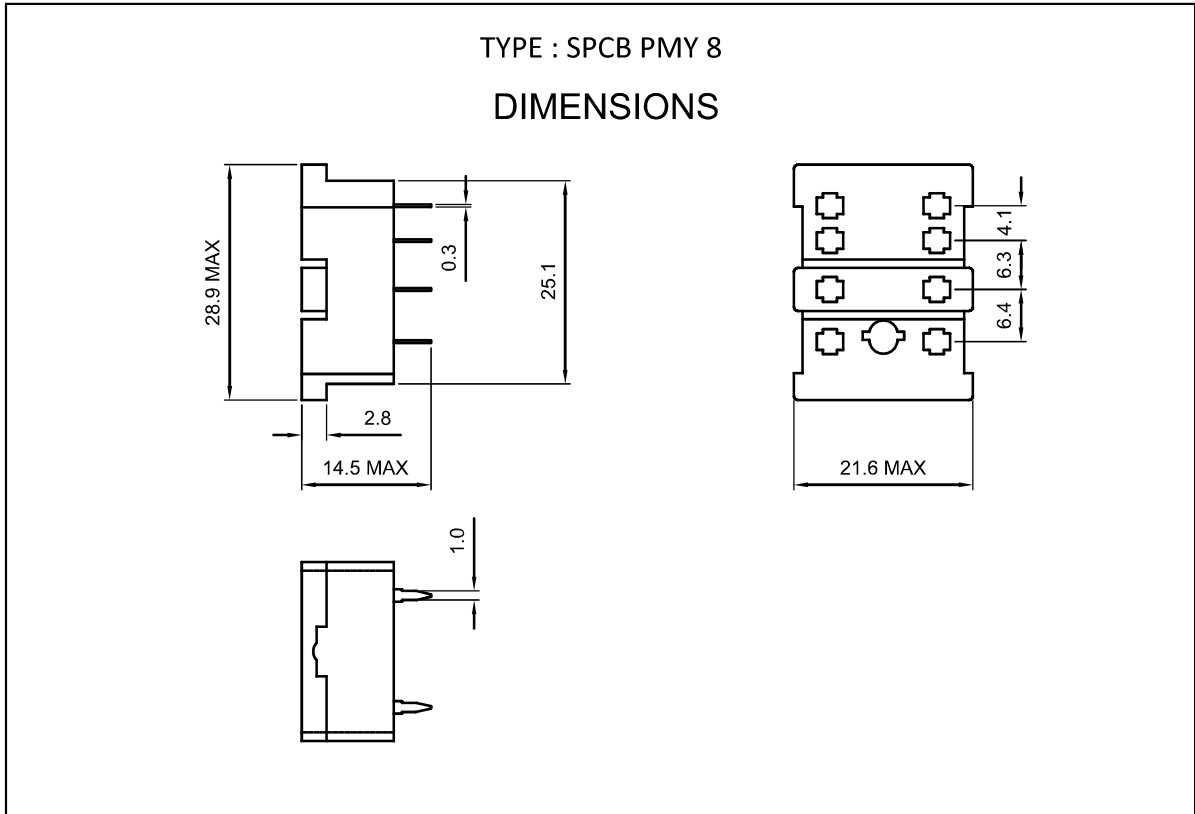

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be ± 0.2 mm
 Outline dimension 1mm and 5mm, tolerance should be ± 0.3 mm Outline dimension 5mm tolerance should be ± 0.4 mm
 2) The tolerance without indicating for PCB layout is always ± 0.2 mm



+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com