



SPCB PMY 8/14 SOCKET

PCB Mount Socket for PMY & PMY-F Series Relays



TECHNICAL SPECIFICATIONS


TYPE	SPCB PMY 8 PIN / 14 PIN	
TERMINAL TYPE	PCB	
CONTACT CONFIGURATION	8 Pin	14 Pin
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC	10 A	
BODY MATERIAL	High Electric Grade Bakelite	
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Electroplated	
TERMINALS	Brass Electroplated	
DI-ELECTRIC STRENGTH	2.5 kV	
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	100 Ω	
AMBIENT TEMPERATURE	-25°C To + 85°C	
ALL DIMENSIONS ARE IN mm (W x L x H)	21.6 X 28.5 X 11 (+4.50)	
WEIGHT IN GRAMS	7 gms	8 gms
MOUNTING	PCB	

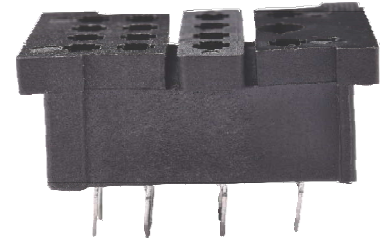

APPLICATIONS

- Ideal Substitute for Costly Relays & Contractors having Front Screw Terminals.
- For Plug in Module & Instrument .

ORDERING CODE FOR RELAY

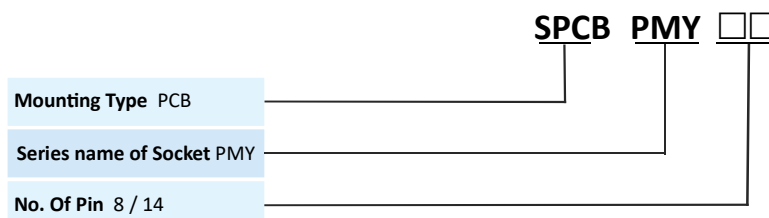

NOTE:-

- 1) Recommended for PMY relays series for PCB Mounting.
- 2) All Specification / Dimensions subject to Tolerance.
- 3) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 22 25106104/05



+91 7045459530



sales@plarelays.com




www.plarelays.com

DIMENSIONS


TYPE : SPCB PMY 8

DIMENSIONS

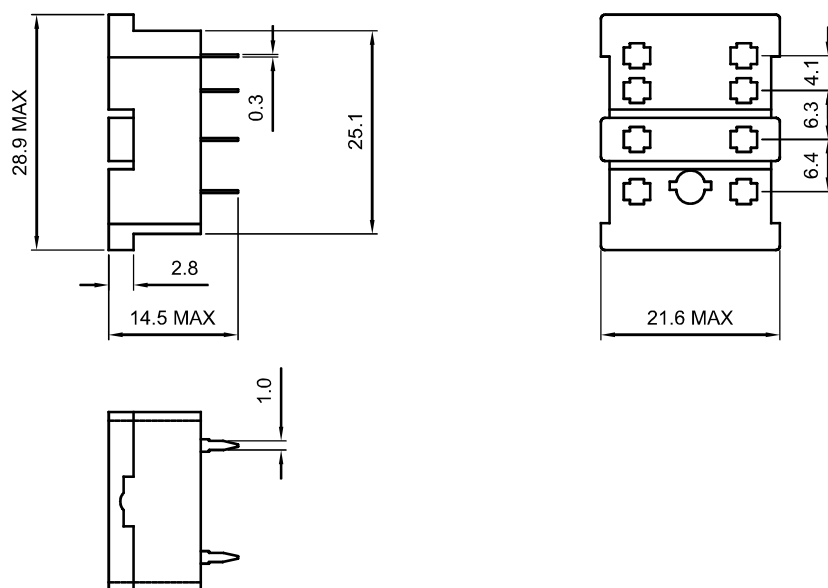

TYPE : SPCB PMY 14

DIMENSIONS

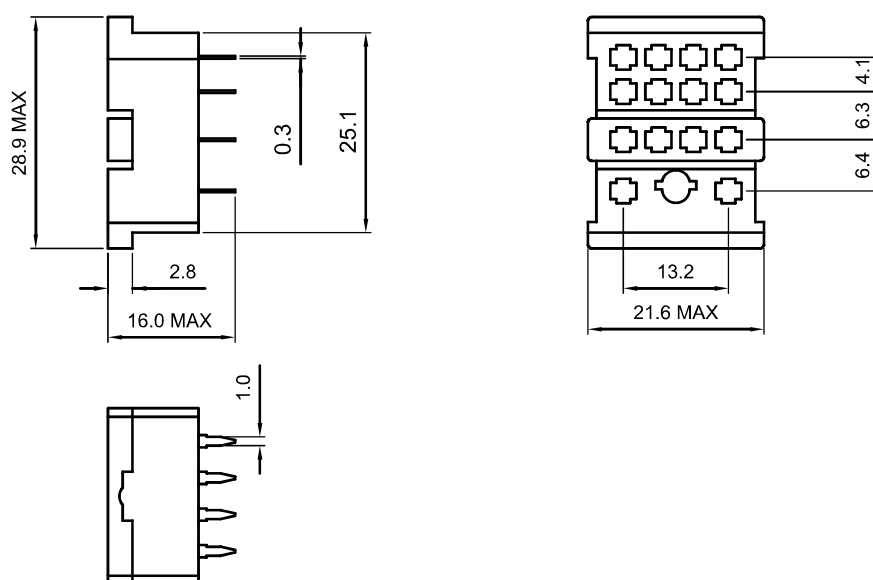

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be $\pm 0.2\text{mm}$
Outline dimension 1mm and 5mm, tolerance should be $\pm 0.3\text{mm}$ Outline dimension 5mm tolerance should be $\pm 0.4\text{mm}$
2) The tolerance without indicating for PCB layout is always $\pm 0.2\text{mm}$



+91 22 25106104/05



+91 7045459530



sales@plarelays.com



www.plarelays.com