

PLE SERIES RELAYS

PCB Mount T Type Relays



TECHNICAL SPECIFICATIONS

TYPE		PLE	
TERMINAL TYPE		PCB	
CONTACT CONFIGURATION		1 N/O & 1 C	
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC		40A	NO : 40A NC : 30A
CONTACT MATERIAL		Silver alloy	
INITIAL CONTACT RESISTANCE (MAX)		0.050 Ω	
COIL NOMINAL VOLTAGES	DC	12 - 24 V	
	AC	-	
OPERATING POWER FOR DC COIL		0.9 W	
DIELECTRIC STRENGTH BETWEEN	OPEN CONTACT	1500 V _{RMS}	
	COIL TO CONTACT	2500 V _{RMS}	
INSULATION RESISTANCE AT 500 VDC AT 27°C & 65% RH		1000 MΩ	
OPERATE TIME (MAX)		10 ms	
RELEASE TIME (MAX)		8 ms	
AMBIENT TEMPERATURE		-40°C To + 85°C	
ELECTRICAL LIFE (NO OF OPERATIONS)		10 ⁵	
MECHANICAL LIFE (NO OF OPERATIONS)		10 ⁶	
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.		27.5 x 32 x 20(+5)	
MAX WEIGHT IN GRAMS (APPROX.)		22 gms	



(Photo For Representation Purpose Only)

SALIENT FEATURES

- Miniature
- PCB Mountable
- High Reliability

APPLICATIONS

- | | | |
|-----------------------|--------------------|----------------------------|
| • Automobiles | • Battery Chargers | • Air Condition Equipments |
| • Domestic Appliances | • Inverters | • Controllers |
| • Stabilizers | • Heaters | |

NOTE:-

- 1) All Specification / Dimensions subject to Tolerance.
- 2) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 9152626104



+91 7045459530



sales@plarelays.com




www.plarelays.com


COIL – DATA (ALL VALUES AT 27°C ± 2° AMBIENT, COLD START)

NOMINAL VOLTAGE (V)	RESISTANCE IN OHM'S ± 10% Ω	MUST OPERATE VOLTAGE (V)	MUST RELEASE VOLTAGE (V)	OPERATING POWER FOR COIL DC COIL (W)
12 V	160	9	1.2	0.9
24 V	660	18	2.4	0.9

ORDERING CODE FOR RELAY

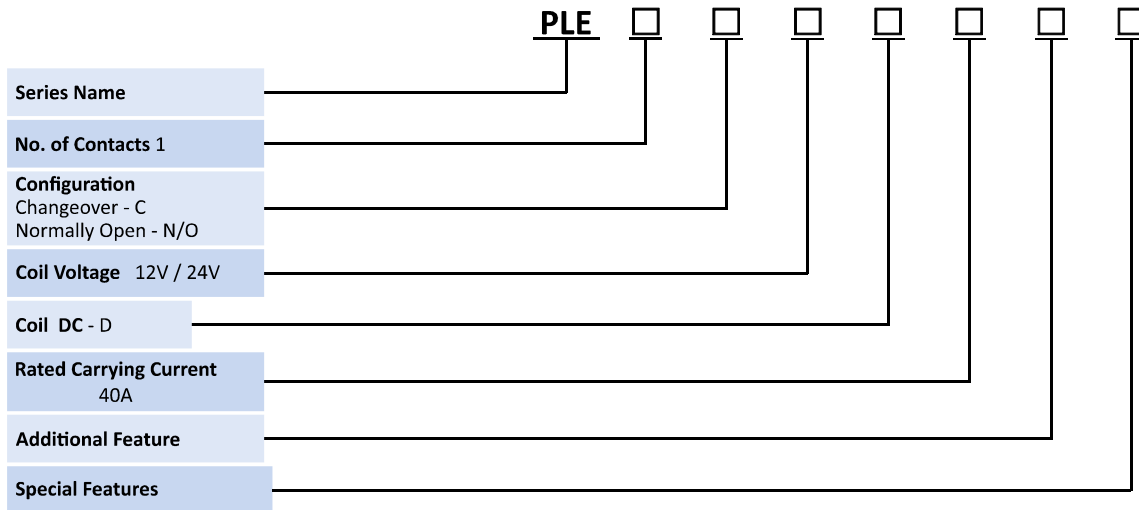

DIMENSIONS

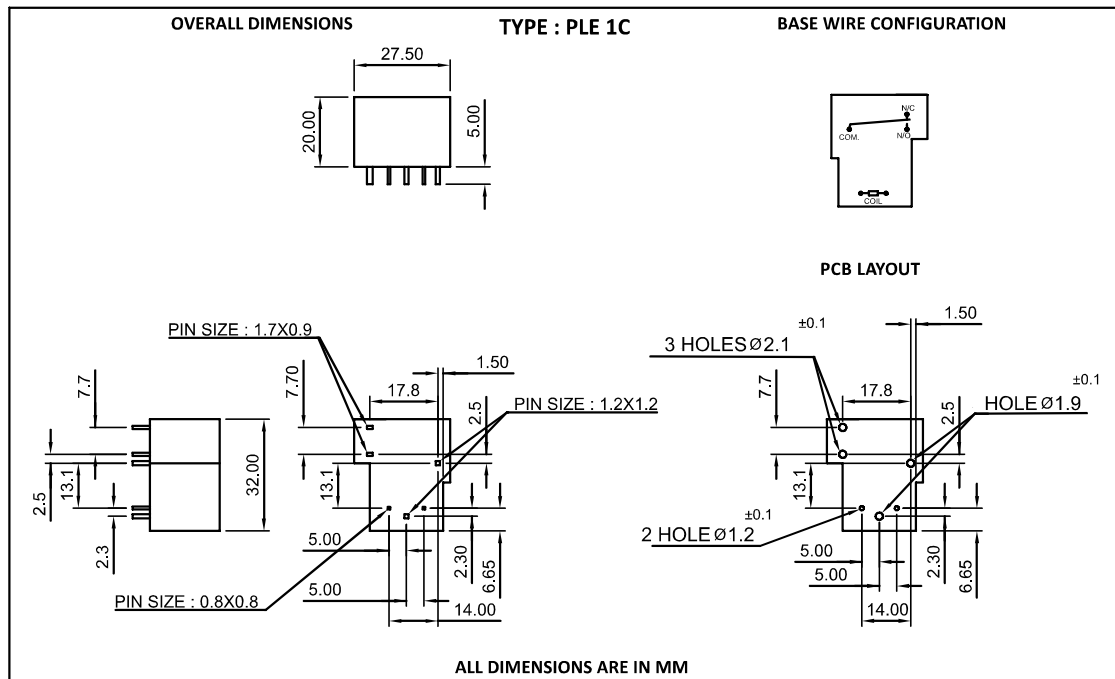

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be ±0.2mm
Outline dimension 1mm and 5mm, tolerance should be ±0.3mm Outline dimension 5mm tolerance should be ±0.4mm
2) The tolerance without indicating for PCB layout is always ±0.2mm



+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com