


PMCMS 5/8 SOCKETS

Socket For PMCM Series Relays



TECHNICAL SPECIFICATIONS


TYPE	PMCMS 5/8		
TERMINAL TYPE	Screw Terminal		
CONTACT CONFIGURATION	5 Pin	8 Pin	
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC	10 A	8 A	16 A
BODY MATERIAL	High Electric Grade Bakelite		
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Electroplated		
TERMINALS	Brass Electroplated		
DIELECTRIC STRENGTH BETWEEN OPEN CONTACT	2 kV		
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	500 MΩ		
MAX TIGHTENING TORQUE	1.0 Nm		
AMBIENT TEMPERATURE	-25°C To + 85°C		
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.	15.8 x 79 x 43	15.8 x 79 x 43	
MAX WEIGHT IN GRAMS (APPROX.)	39 gms	46 gms	
MOUNTING	Din Rail		

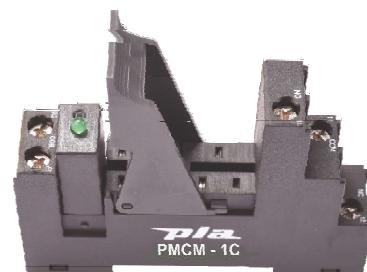

(Photo For Representation Purpose Only)

APPLICATIONS

- Ideal Substitute for Costly Relays & Contractors having Front Screw Terminals.
- For Plug in Module & Instrument.

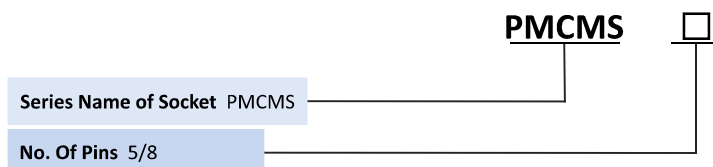

NOTE:-

- 1) Recommended for PMCM Relays.
- 2) All Specification / Dimensions subject to Tolerance.
- 3) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 9152626104



+91 7045459530




sales@plarelays.com



www.plarelays.com

1

DIMENSIONS

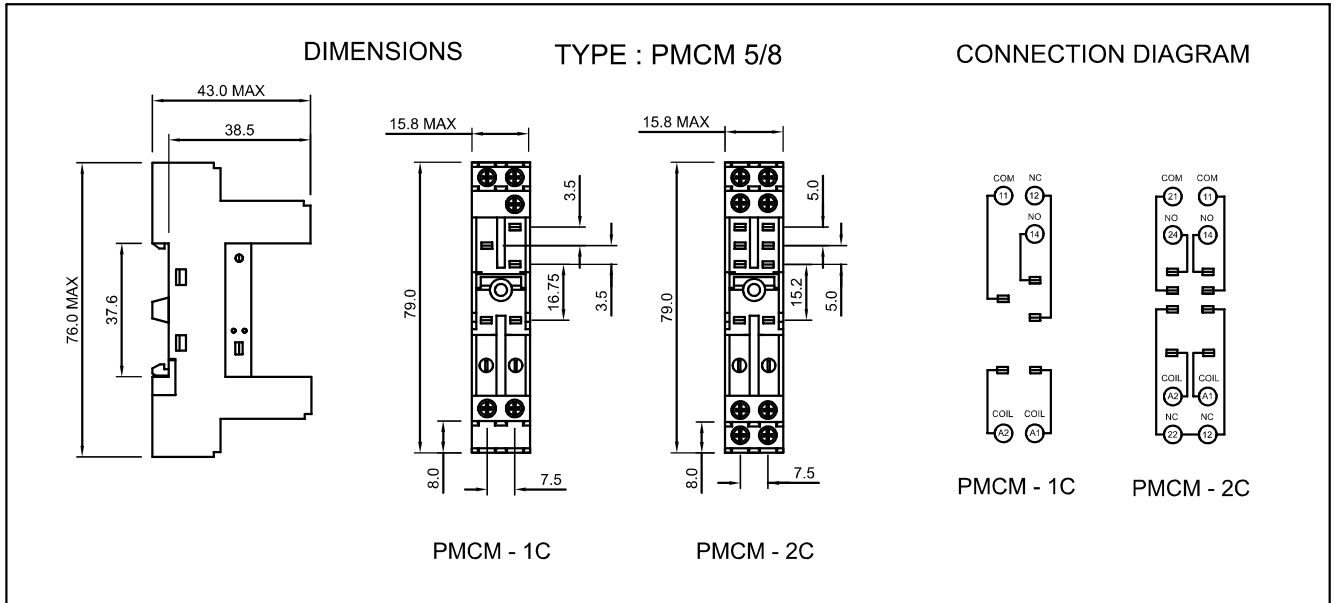

+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com