


PRS S1 SOCKET

Socket for HPCC, LPR 30, LPR 40 2C & 3C Series Relays



TECHNICAL SPECIFICATIONS

TYPE	PRS S1
TERMINAL TYPE	Screw Terminal
CONTACT CONFIGURATION	11 Pin
RATED CARRYING CURRENT (RESISTIVE) AT 24 VDC / 250 VAC	40 A
BODY MATERIAL	High Electric Grade Bakelite
CONTACT MATERIAL	Electrical Grade Phosphor Bronze Spring Action Tubular Contacts Electroplated
TERMINALS	Brass Electroplated
DI-ELECTRIC STRENGTH	2 kV
MAX TIGHTENING TORQUE	0.6 Nm
INSULATION RESISTANCE AT 500 VDC AT 27°C & + 65% RH	500 MΩ
AMBIENT TEMPERATURE	-25°C To + 85°C
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.	54.5 x 83.5 (+3.0) x 29.5
MAX WEIGHT IN GRAMS (APPROX.)	85 gms
MOUNTING	Din Rail & Screw

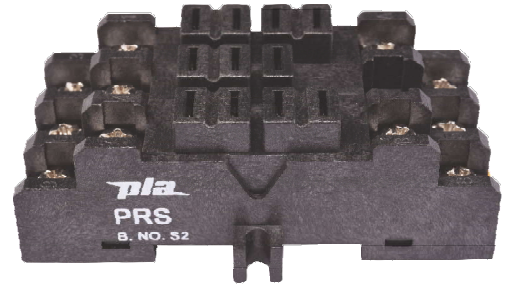


(Photo For Representation Purpose Only)

APPLICATIONS

- Ideal Substitute for Costly Relays & Contractors having Front Screw Terminals.
- For Plug in Module & Instrument.

ORDERING CODE FOR RELAY

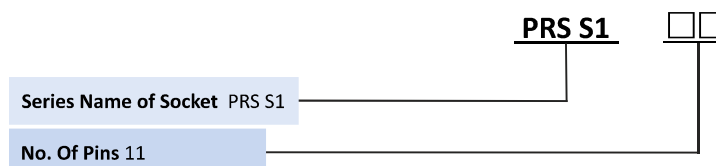

NOTE:-

- 1) Recommended for HPCC, LPR 30, LPR 40 2C & 3C Series Relays .
- 2) All Specification / Dimensions subject to Tolerance.
- 3) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.



+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com



1

DIMENSIONS


DIMENSIONS

TYPE : PRS S1

CONNECTION DIAGRAMS

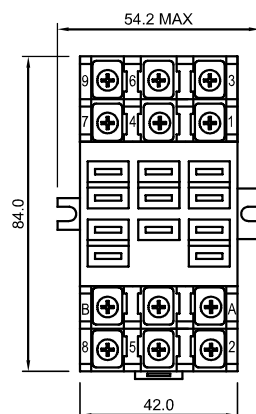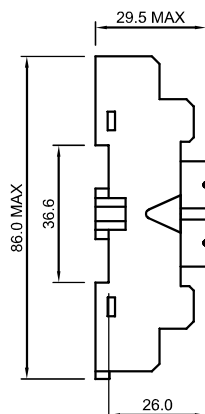

PRS



PRS

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be $\pm 0.2\text{mm}$
Outline dimension 1mm and 5mm, tolerance should be $\pm 0.3\text{mm}$ Outline dimension 5mm tolerance should be $\pm 0.4\text{mm}$
2) The tolerance without indicating for PCB layout is always $\pm 0.2\text{mm}$



+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com