


# RA 2 / MA 2 SWITCH

Reed Proximity switch with magnetic assembly



TECHNICAL SPECIFICATIONS	
TYPE	RA 2 / MA 2
TERMINAL TYPE	-
CONTACT CONFIGURATION	1 N/O
RATED CARRYING CURRENT (RESISTIVE) AT 200 VDC	0.5A (Max 200 VDC) & 10W Max
AMBIENT TEMPERATURE	-40°C To + 85°C
LIFE EXPECTANCY	10 <sup>7</sup> Operations at Optimum Load Conditions.
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.	23 x 13.9 x 6
MAX WEIGHT IN GRAMS (APPROX.)	RA 2 :- 4.2 gms MA 2 :- 3.2 gms
MAX SWITCHED POWER	10W / VA
BREAKDOWN VOLTAGE	250 VDC
MAGNET SIZE	20 mm x Ø 4.0 mm

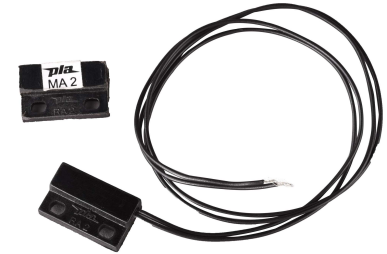

(Photo For Representation Purpose Only)




## SALIENT FEATURES

- Excellent Isolation
- Epoxy Encapsulation

## APPLICATIONS

- Machine Tools
- Photo Copiers
- Flow Sensing
- Elevators
- Conveyors
- Washing Machine
- Limit Switches

## ORDERING CODE FOR RELAY

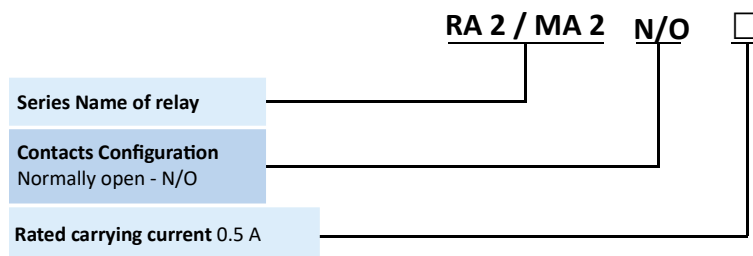

### NOTE:-

- 1) All Specification / Dimensions subject to Tolerance.
- 2) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.
- 3) Longer wires can be made available as per specific requirements.



+91 9152626104



+91 7045459530




sales@plarelays.com



www.plarelays.com

## DIMENSIONS

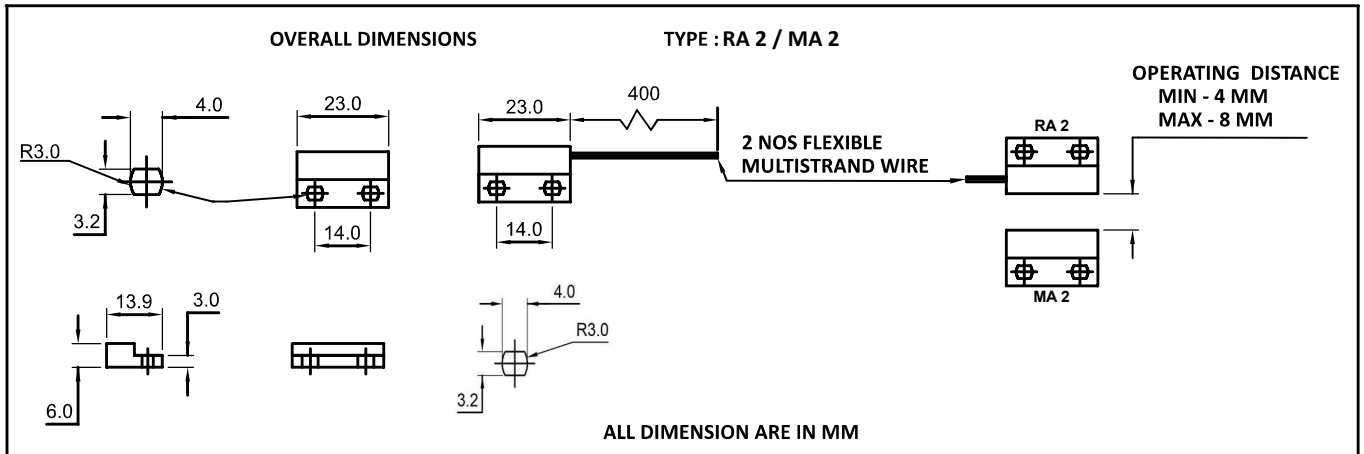

**NOTE :-** 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be  $\pm 0.2$ mm  
Outline dimension 1mm and 5mm, tolerance should be  $\pm 0.3$ mm Outline dimension 5mm tolerance should be  $\pm 0.4$ mm  
2) The tolerance without indicating for PCB layout is always  $\pm 0.2$ mm



+91 9152626104



+91 7045459530



sales@plarelays.com



www.plarelays.com

2