

TECHNICAL SPECIFICATIONS

TYPE		SIP	
TERMINAL TYPE		PCB	
CONTACT CONFIGURATION		1 N/O	
RATED CARRYING CURRENT (RESISTIVE) AT 200 VDC / 125 VAC		0.5A (Max 200 VDC & 10 W)	
INITIAL CONTACT RESISTANCE (MAX)		0.100 Ω	
COIL NOMINAL VOLTAGES	DC	5 - 12 V	
	AC	-	
OPERATING POWER (MIN-MAX)FOR DC COIL		0.05 - 0.08 W	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACT	250 VDC	
	COIL TO CONTACT	500 VDC	
INSULATION RESISTANCE		1000 MΩ	
OPERATE TIME INCLUDING BOUNCE		1 ms	
RELEASE TIME INCLUDING BOUNCE		0.5 ms	
AMBIENT TEMPERATURE		-40°C To + 85°C	
LIFE EXPECTANCY		10 ⁷ Operations at Optimum Load Conditions.	
ALL DIMENSIONS ARE IN MM (W X L X H) APPROX.		10 x 22.3 x 10.5 (P)	8.3 X 24.3 X 8.75
MAX WEIGHT IN GRAMS (APPROX.)		5 gms	
REED BREAK - DOWN VOLTAGE		250 VDC	
VIBRATION		20g, 10-1000 Hz	
SHOCK		50g, 11 ms	



(Photo For Representation Purpose Only)



SALIENT FEATURES

- Cost Effective
- Low Power Consumption
- High Capacity
- Single in Line Package

APPLICATIONS

- Modem's
- Computers
- Circuit Isolation
- Encodes & Decoder
- Programming
- Communication
- PF Switching
- Push Button Dialers
- Telemetry
- Scanner

NOTE:-


- 1) All Specification / Dimensions subject to Tolerance.
- 2) Any Techno commercial changes is / are prerogative of manufacturer / management of the company which can be done without any notice.




COIL – DATA (ALL VALUES AT 27°C ± 2° AMBIENT, COLD START)

NOMINAL VOLTAGE (DC)	RESISTANCE IN OHM'S ± 10% Ω	MUST OPERATE VOLTAGE	MUST RELEASE VOLTAGE	OPERATING POWER FOR DC COIL (W)
5 V	500	4	0.5	0.05W
12 V	2k	9.6	1.2	0.072W

ORDERING CODE FOR RELAY

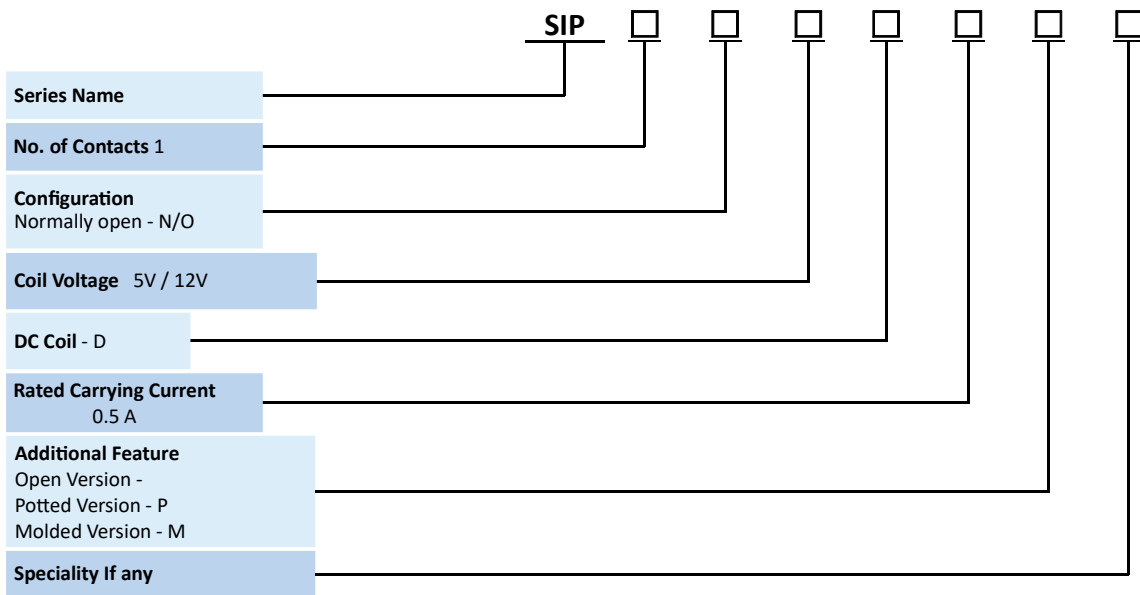

DIMENSIONS

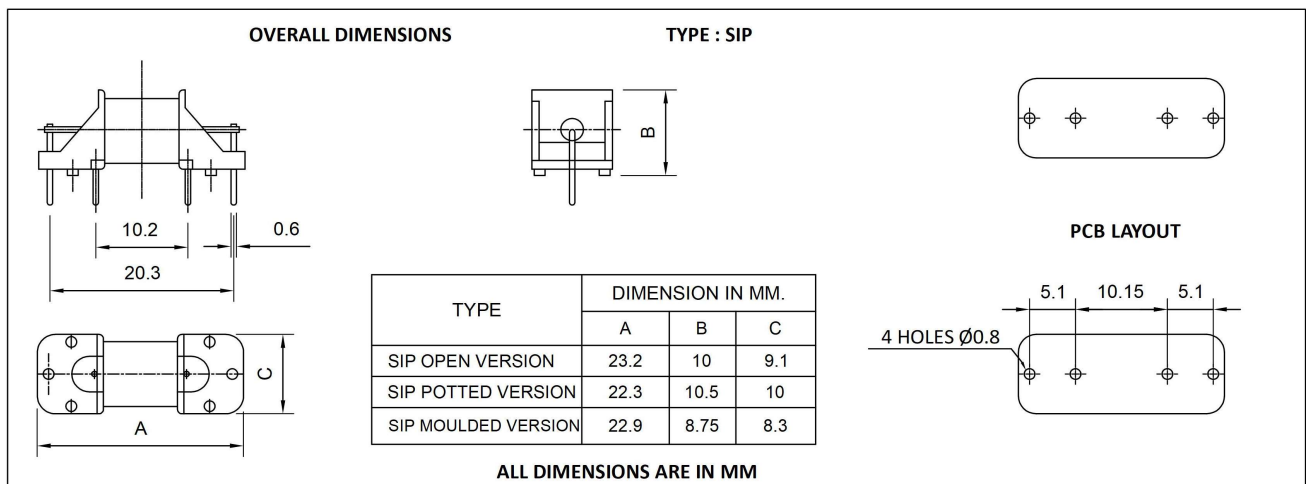

NOTE :- 1) In case no tolerance shown in outline dimensions : Outline dimension 1mm, tolerance should be ±0.2mm
Outline dimension 1mm and 5mm, tolerance should be ±0.3mm Outline dimension 5mm tolerance should be ±0.4mm
2) The tolerance without indicating for PCB layout is always ±0.2mm